



NCCM[®] CX

Chemically-Resistant Nonwoven Rolls




Advanced solutions for caustic, alkaline and acidic applications



NCCM® CX

Advanced solutions for caustic, alkaline and acidic applications

NCCM® CX rolls have excellent cover lifetime and wringing ability in caustic and acidic environments. Self-healing properties provide cut resistance against strip edge damage, and wear resistance of our high-tech nonwoven material extends roll life long past traditional rubber coverings. The excellent wringing ability is based on porosity and contributes to the impressive performance of the roll over time.

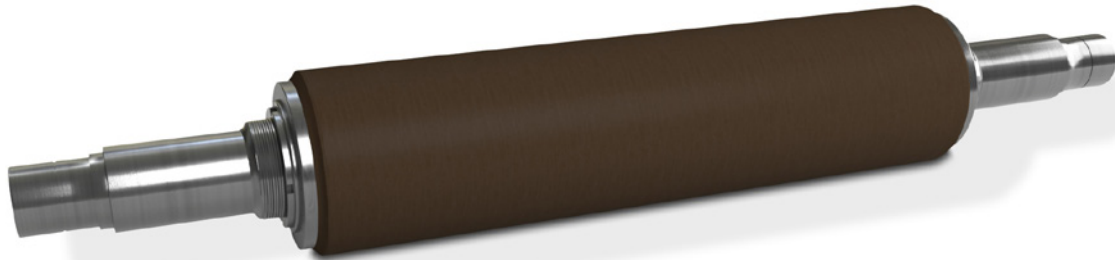

TECHNICAL INFORMATION:

NCCM CX-SERIES PRODUCT
NCCM® CX
 Chemically-Resistant Nonwoven Rolls
 Advanced solutions for caustic, alkaline and acidic applications

Primary Metals

API (Asphalt & Paving Lines)	BAL (Bright Anodizing Lines)	CAL (Continuous Anodizing Lines)	COL (Coil Coating Lines)	CTL (Coiler Coating Lines)	CL (Cold Chilling Lines)	CPL (Continuous Glazing Lines)	CRM (Continuous Pickling Lines)	DI (Cold Rolling Mills)	DPL (Pickling and Pickling Lines)	EC (Electrolytic Coating Lines)	EGL (Electrolytic Coating Lines)	GL (Galvanizing Lines)	HQGL (Hot Dip Galvanizing Lines)	LM (Lamination Lines)	OCL (Oiling Lines)	PL (Pickling Lines)	PL (Pickling Lines)	RM (Reversing Mills)	SPM (Strip Mills)	TL (Tension Leveling Lines)	TLL (Tension Leveling Lines)	TM (Temper Mills)
------------------------------	------------------------------	----------------------------------	--------------------------	----------------------------	--------------------------	--------------------------------	---------------------------------	-------------------------	-----------------------------------	---------------------------------	----------------------------------	------------------------	----------------------------------	-----------------------	--------------------	---------------------	---------------------	----------------------	-------------------	-----------------------------	------------------------------	-------------------

Long-life roll for **CHEMICALLY-DEMANDING** applications and positions

This chart is meant to give an overview and does not provide any formal guarantees for any line. Please contact an NCCM representative for further recommendations and technical support.

NCCM CX-SERIES PRODUCT
NCCM® CX
 Chemically-Resistant Nonwoven Rolls
 Advanced solutions for caustic, alkaline and acidic applications

Wringing	Oiling	Blank Washing	Tension/Break	Smasher	Brillier	Cradle	Deflector	Pinch/Feeder	Table/Conveyor	Vacuum
----------	--------	---------------	---------------	---------	----------	--------	-----------	--------------	----------------	--------

Long-life roll for **CHEMICALLY-DEMANDING** applications and positions

This chart is meant to give an overview and does not provide formal guarantees for any application. Please contact an NCCM representative for further recommendations and technical support.

NCCM® CX	DENSITIES	4CX, 5CX, 6CX and 7CX	OPERATIONAL pH	pH range 0-14
	SIZES	Max. rolls size: 647,7mm (25.5") OD; 457,2mm (18") ID Min. roll size: 50,8mm (2") OD; 25,4mm (1") ID	MAX. TEMPERATURE	93°C (200°F)
			MAX. OPERATING PRESSURE	13,7N/mm (78 PLI)

All application parameters are relative to specific applications and do not provide formal guarantees. Please contact an NCCM representative for further insight and questions on sizes, parameters and requirements.

NCCM® CX

FEATURES

- Resistant to many different chemicals
- Longest life compared to any other chemical roll
- Repairability
- Chemical fluid control
- High coefficient of friction
- Self-healing
- Cut resistant
- Porosity

BENEFITS

- Reduced replacement cost
- Reduced inventory cost
- Reduced maintenance cost
- Reduced fluid usage/cost
- Reduced fluid contamination
- Increased line uptime
- Increased line speed

Please contact an NCCM representative for additional information on features and benefits.

